

PRIMUS II - 500 W
JUICER MIXER GRINDER

BOROSIL®

Performs Beautifully



USER MANUAL

BJMG500W11

READ ALL INSTRUCTIONS BEFORE USING THIS APPLIANCE

IMPORTANT INSTRUCTIONS

Congratulations on your purchase of
BOROSIL PRIMUS II - 500W JUICER MIXER GRINDER!

To enable your product to give you many years of perfect trouble free service, we recommend you to carefully follow the instructions of the manual.

Read and follow all the instructions in the manual even if you are familiar with the product, and find a place to keep it handy for future reference.

IMPORTANT SAFEGUARDS



When using electrical appliances, basic safety precautions should always be followed including the following:

1. Use only 230V - 50Hz supply.
2. The Juicer Mixer Grinder is for household use only.
3. Keep the Juicer Mixer Grinder at least 6" (152 mm) away from the walls for proper ventilation.
4. The Juicer Mixer Grinder should be kept on a levelled surface.
5. Do not place the Juicer Mixer Grinder on a wet surface.
6. Do not let the supply cord hang over the edge of the table or counter or touch hot surfaces.
7. Sufficient space should be available around the Juicer Mixer Grinder for keeping the various items and ingredients required.
8. Never try to touch the moving parts or blades of the Juicer Mixer Grinder while in operation.
9. The blades are sharp and should be handled very carefully.
10. Never operate the Juicer Mixer Grinder without the jar lid or dome in place.
11. Always make sure the jar has been locked in the slot before operating.
12. Never operate the Juicer Mixer Grinder without any load in the jar.


TECHNICAL DATA:

- Specifications : 500W, 230V - 50Hz
- Rating : 30 minutes
- Speed : 19,000 R.P.M. approx

PARTS IDENTIFICATION

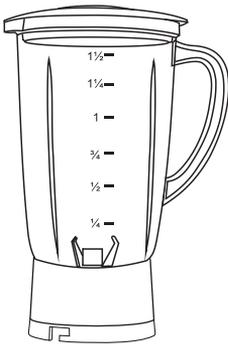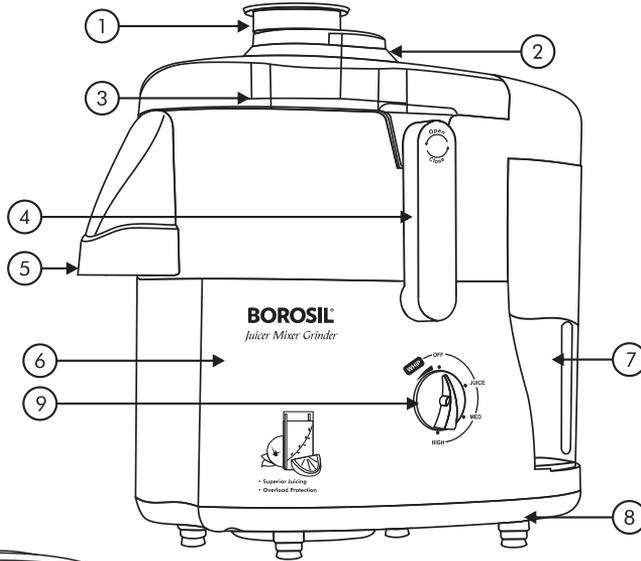


Liquidizing / Blending jar

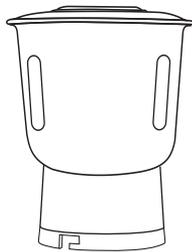


Wet / Dry Grinding Jar



Liquidizing / Blending Blade



Juicer Mesh



Wet / Dry Grinding Blade

PARTS IDENTIFICATION

- | | |
|-----------------|---------------------------------------|
| 1. Pusher | 7. Pulp container with pullout handle |
| 2. Juicer cover | 8. Base |
| 3. Juicer mesh | 9. 3 position rotary switch |
| 4. Swing locks | |
| 5. Spout cover | |
| 6. Body | |

GENERAL INSTRUCTIONS

- 3 position rotary switch : By turning the switch clockwise you can select the desired speed.
- Whip function : Turn the switch knob anti clockwise from the OFF position to use the whip function
- Always turn the switch to the OFF position before storing the appliance for next use, to avoid accidents.
- For juicing: Turn the speed knob clockwise from the OFF position to use the Juice function.




Fig. 1

HOW TO USE

JUICING

- Always ensure that the supply voltage is in accordance with the rated voltage. Before plugging into the power source make sure that the switch is at "OFF" position and the juicermesh is securely place with juicer cover securely clamped on the juicer body by swing locks.
- Wash fruits and vegetables and cut it into small pieces so that they can be inserted into the feeder tube easily.
- Plug into the unit. Turn the knob at JUICE position for juicing. For short operation, turn the speed knob to WHIP position. Place a container below the spout outlet for collecting juice.
- Insert the fruit into the feeder tube and press them down gently with the help of food pusher.
- Once the juicing operation is over, press the switch to "OFF" position and unplug the unit.

LIQUIDIZING AND BLENDING

The liquidizing and blending jar (refer figure 2) is used for preparation of shakes, purees etc.

- Put all the ingredients to be liquidized or blended in the jar.
- Safely put the jar lid in place.
- Make sure the jar lid cap is in place. The jar lid cap can be used to add sugar or more liquid after the initial blending or liquidizing.
- Now switch the appliance for operation.

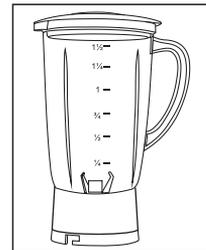


Fig. 2

NOTE: JAR CAPACITY: 1.5L MAX. USABLE CAPACITY: 600 ml

- Always ensure proper fixing of jar lid and lid cap. Keep a hand on the jar lid while on operation.
- Initially use whip for better results.
- Do not use this jar for wet grinding.

GRINDING

The grinding jar (refer figure 3) is used for grinding garam masala, wet masala, sugar, soaked dal or rice etc in small quantity.

- Use small pieces of ingredients for grinding.
- Add water, as per requirement, in case of wet grinding.
- Put the jar lid on top of the jar.
- Grind at "MED" speed for 15-30 seconds and then move to "HIGH" speed.

NOTE: JAR CAPACITY: 1L MAX. USABLE CAPACITY: 400 ml

- Always ensure proper fixing of the jar lid and lid cap. Keep a hand on the jar lid while on operation.
- Always move gradually from lower speed to higher speed.
- During grinding process, the jar might get heated up due to friction. Do not panic. This is normal.




Fig. 3

OVERLOAD PROTECTION (OLP)

- The overload protector (OLP) is designed to protect the motor from burning.
- In case of an overload the blade of the jar/juicing mesh stops rotating and the motor gets jammed and starts heating up. The OLP trips off and the motor stops automatically.
- Turn the knob to off position and remove the jar/juicing mesh.
- Let the motor cool down for a couple of minutes and then reset the OLP by pressing the red button situated at the bottom of the body. (refer Fig. 4)
- If you have to reset the OLP again and again, try reducing the quantity in the jar.




Fig.4

USE & CARE / PRECAUTION

- Before starting the juicer mixer grinder for the first time or after a long period of non usage, rotate the motor shaft with hand to ensure that it turns freely and smoothly. Make sure the unit is not connected to the electric supply source.
- Similarly rotate the jar coupler to ensure the blade turns freely and smoothly as well.
- Insert the jar collar into the motor body and twist it to lock it in the slot.
- Now plug in the power cord and the juicer mixer grinder is ready for use.
- Do not use your juicer mixer grinder without load and make sure the jar lid is in place before operating the appliance.
- The body of the juicer mixer grinder or the supply cord should never be immersed in water while operation or cleaning.
- Never pull the cord to take out the plug from the socket. Grip the plug and pull out of the socket after duly switching off the power supply.
- Always remove the plug from the power supply before cleaning, while emptying or when not in use.
- Check the power supply cord and plug if it has any cuts before plugging in for operation. Do not use the appliance if there is any damage to the supply cord.

- Keep out of reach of children. The appliance should never be operated by children.
- In the rare event of your juicer mixer grinder not working, do not attempt to repair it at home or allow any unauthorised person to do so. Instead take it to Borosil Authorized Service Center.
- Store the appliance in a clean and dry place.

GENERAL CLEANING AND CARE FOR THE JUICER MIXER GRINDER

- The cleaning of the juicer mixer grinder and jars are very necessary for maintaining smooth operation of the juicer mixer grinder and to maintain proper hygiene.
- After you have used the juicer mixer grinder, use lukewarm water to remove leftover material from the jars and then rinse under running water.
- In order to clean the blades thoroughly, remove the blades by using the spatula (refer figure 5) to loosen the screw by twisting the dome nut on the blade clockwise, while holding the coupler from under the jar.
- When removing the blade please keep the washer safely for fitting again.
- The jars can be cleaned by using regular dishwashing soap.
- After thoroughly rinsing the soap, clean the jars with a dry cloth.
- Never store the jars with the lids fitted. This results in problem of odour in jars. For cleaning the body of the juicer mixer grinder, use a soft wet cloth.
- For cleaning the juicing assembly. Open all the parts by unlocking the swing locks and lifting the juicer cover, remove the juicing mesh assembly by pulling it out. Remove the spout cover from the juicer body.
- Pulp collector, spout cover top lid & pusher may be cleaned by using mild soapy water. Rinse thoroughly and dry before storing.
- Clean the Juicing mesh under running water. A soft brush may be used for cleaning the mesh and cutter sieve. Do not use a wire wool, scouring pad or strong abrasives for blender jar.
- Do not use any detergent/soap solution on the main body.
- Clean the body with a dry cloth before storage for next use.
- Never immerse the motor in the water for cleaning.

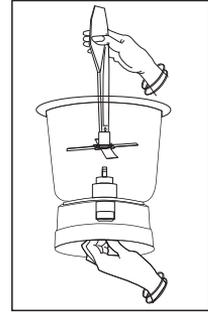


Fig. 5

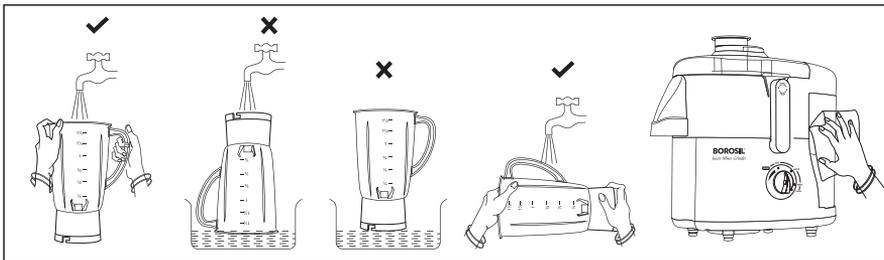


Fig. 6

WARRANTY FOR REPAIR & SERVICES

This product comes with a warranty of Two Years on product from the date of purchase as specified on the Warranty Card. This is against all defective material or workmanship. In the event of a defect, Borosil Limited at its sole choice, will either repair or replace this product or any component of the product found to be defective free of cost through any Borosil Authorized Service Center or at customer place or with dealer from whom it has been purchased during the warranty period.

For any information or problem, contact Borosil Customer Care Toll Free No. **1800 224 552** or **e-mail us at myborosil@borosil.com** or contact your local dealer or **Borosil Authorized Service Centre** and provide information about the defect with the model number and the serial number of the product.

The warranty is not valid in case:

1. Product is not used according to user manual.
2. Defects caused by improper or reckless use.
3. Repairs done by persons other than Borosil Authorized Service Centre.
4. Modifications of any nature made in the product.
5. Tampered serial number and incomplete warranty card after purchase.
6. Product if used for commercial purpose (i.e. other than domestic use)
7. Usage of parts not recommended by Borosil or those made by other manufacturers.
8. The model no. on the invoice is different from the product to be repaired
9. Borosil is not responsible for accidents arising due to the use of accessories not designed for the utilisation with this product.
10. If the defects are caused by fire, flood and the other act of god.
11. If the defects are caused by use of incorrect current or voltage or faulty electric power supply.
12. All consumables and parts susceptible to normal wear & tear are not covered under warranty.
13. This warranty does not cover damage or injury caused by accident, mishandling, misuse or normal wear and tear or for loss of injury, directly or indirectly arising out of use of this product. The decision of the company in this regard shall be final.
14. If the product is used with any type of adapter or connector.
15. If the product is used in locations with different electrical specifications.

WARRANTY CARD	BOROSIL®
THIS CARD IS VALID ONLY IF IT IS FILLED IN COMPLETELY, SIGNED AND STAMPED BY THE DEALER ON THE DATE OF PURCHASE	
MODEL CODE :	BJMG500W11
CUSTOMER'S NAME :	_____
ADDRESS :	_____
PHONE NO. RESIDENCE :	_____ OFFICE : _____
DATE OF PURCHASE & BILL NO. :	_____
DEALER NAME & SIGN :	_____
CUSTOMER'S SIGNATURE :	_____
DEALER'S STAMP	

BOROSIL®

CORPORATE OFFICE:

BOROSIL LIMITED

1101, G-Block, Crescenzo, BKC, Bandra (East), Mumbai- 400 051, Maharashtra.

Website: www.myborosil.com | **Customer Care Toll Free No.:** 1800 224 552 / 1800 2106 520

Email id: myborosil@borosil.com | Tel.: 022 6740 6300 | Fax: 022 6740 6514

CIN No.: L36100MH2010PLC292722

SALES OFFICE:

MUMBAI:

Kanakia Zillion, B-Wing, Unit No. 306, L.B.S Marg, Next to Kurla Bus Depot, Kurla (W),

Mumbai- 400 070. | Tel.: 022 6740 6400 | Fax: 022 6740 6444

email id: mumbaisales@borosil.com

DELHI:

19/90, P-Block, Connaught Place (Madras Hotel Block), New Delhi- 110 001.

Tel.: 011 2334 3897 | Fax: 011 2374 6689 | email id: delhi@borosil.com

CHENNAI:

NEW No. 20, (Old No. 9) 1st Floor, Brahadammal Road, Nungambakkam, Chennai- 600 034.

Tel.: 044 2822 6012 / 2822 6013 | Fax: 044 2822 6014

email id: borosilmso@ethnet.com / chennai@borosil.com

KOLKATA:

E-2/3, 2nd Floor, Gilander House, Netaji Subhash Road, Kolkata, West Bengal- 700 001.

Tel.: 033 2229 9166 / 2226 2045 | email id: calcutta@borosil.com

GURUGRAM:

201, 2nd Floor, CRS Towers, Plot No. 77-B, Village Sarhaul, Iffco Road, Sector- 18, Gurugram,

Haryana- 122 015. | Tel.: 0124 6926 333

BENGALURU:

Spatium South Park, 54, 1st Floor, 1st Main Rd, Sarakki Industrial Layout, Dollar Layout, 3rd Phase,

J. P. Nagar, Bengaluru, Karnataka 560078.

email id: bangalore@borosil.com

**GOT A SERVICE-RELATED QUERY OR
NEED CUSTOMER SUPPORT?**



SCAN THE QR CODE & PLACE YOUR
SERVICE REQUEST ON WHATSAPP 24 x 7
+91 7208487334



TOLL FREE NUMBER

**1800 224 552 /
1800 2106 520**



Shop online at www.myborosil.com | Follow us on    Borosil And You